




Black and Decker BL3000S Circuit Board

Remove the circuit board from the Black and Decker BL3000S.

Written By: Andrew

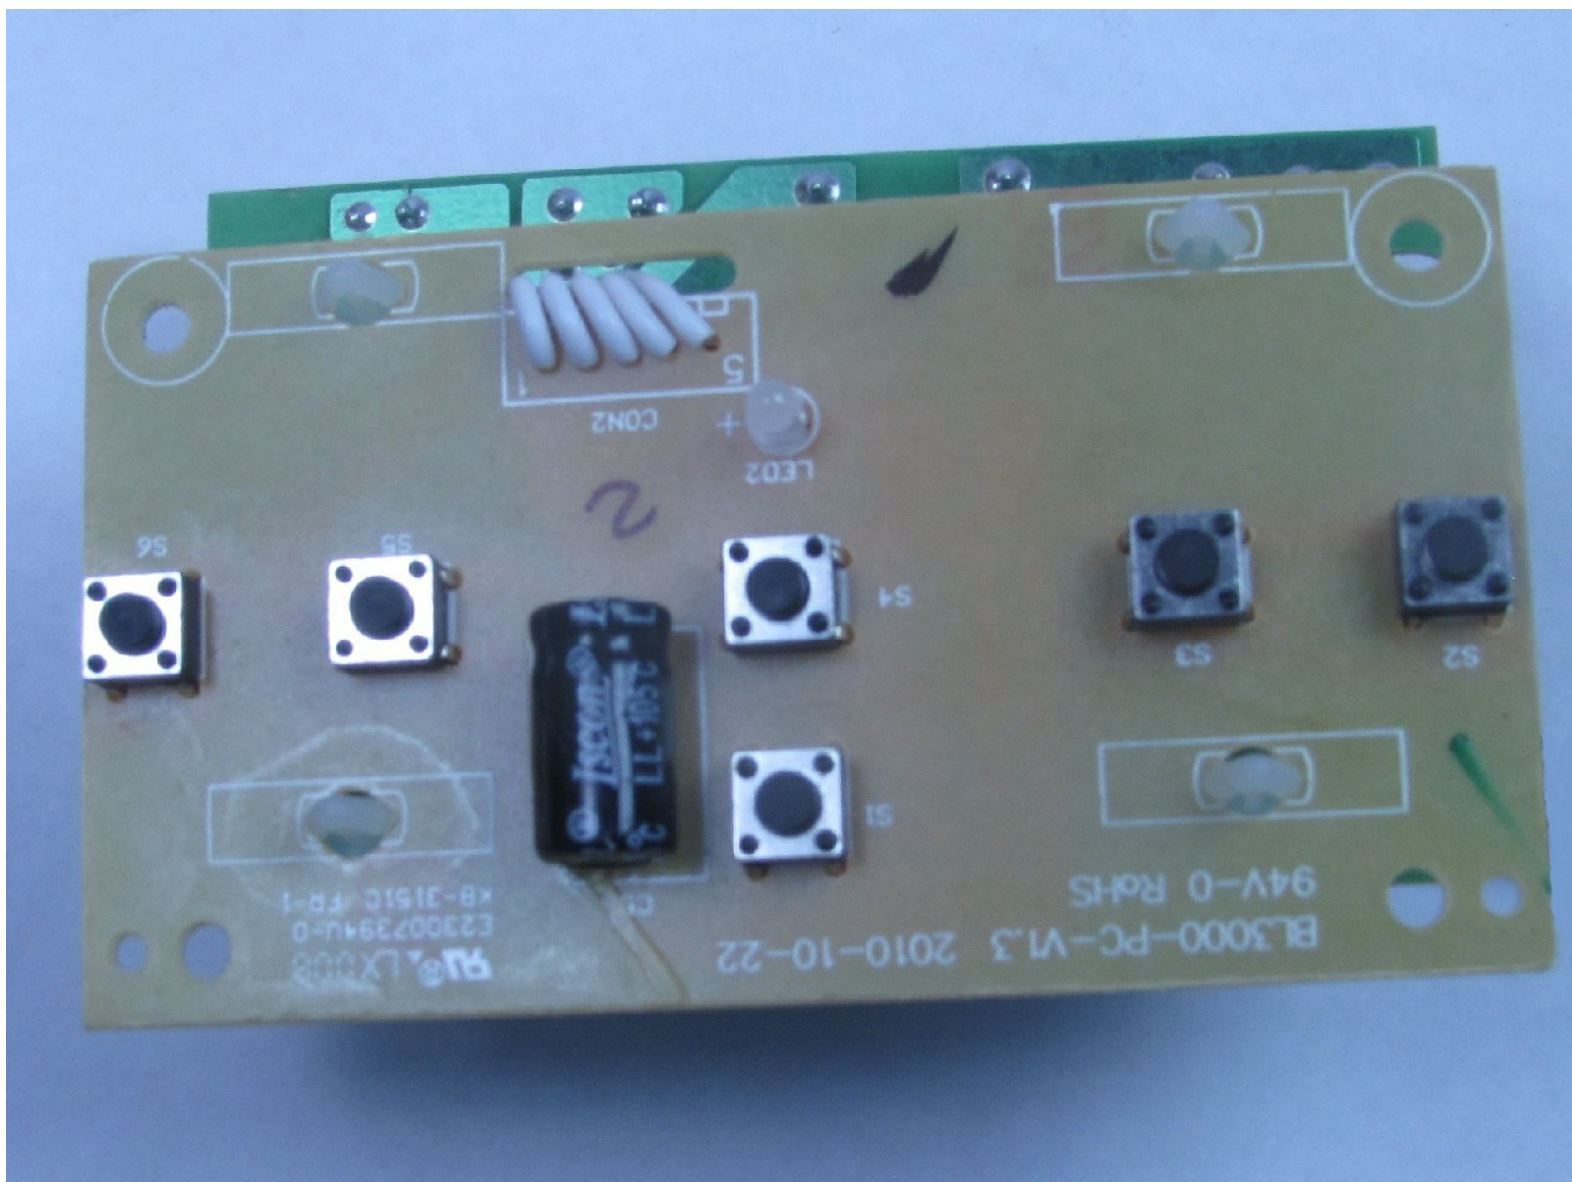



TOOLS:

- [2.5 mm Flathead Screwdriver](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
 - [TA20 Screwdriver](#) (1)
-

Step 1 — Blender Base



i Before disassembling the blender base, make sure the blender is disconnected from any power outlet.

- Lift the jar straight up from the base without tilting the jar.

Step 2



- Remove the top three 1/4 inch base screws using a Philip's head screwdriver.

Step 3



- Remove the two base leg covers next to the power cord using pliers or a flat-head screwdriver.

i This provides access to the base screws beneath.

Step 4



- Remove the following screws that secure the top and bottom halves of the base.

- One 1/4 Phillips screw

- One TA-20 screw

i Both screwdrivers must have a minimum of a three inch shank (length).


i Screwdrivers with extenders will not fit down the access holes.

Step 5





- Lift the top half of the base from the bottom half of the base to reveal the internal mechanism.

Step 6 — Circuit Board

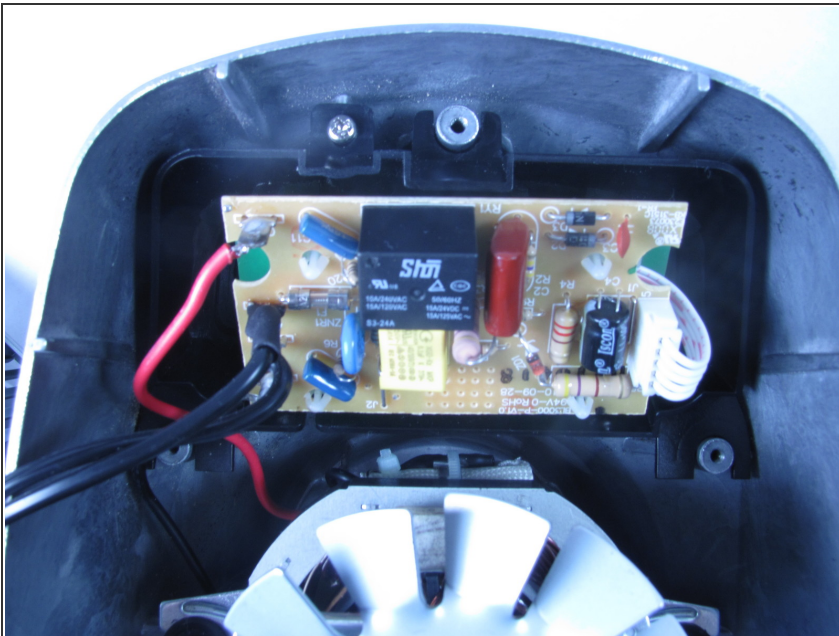


- Once you have the base removed, the circuit board should be clearly visible inside.

Step 7

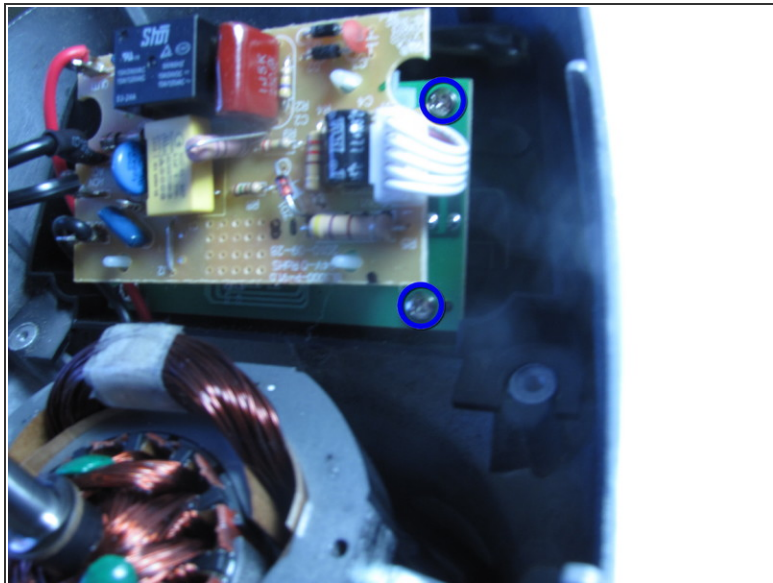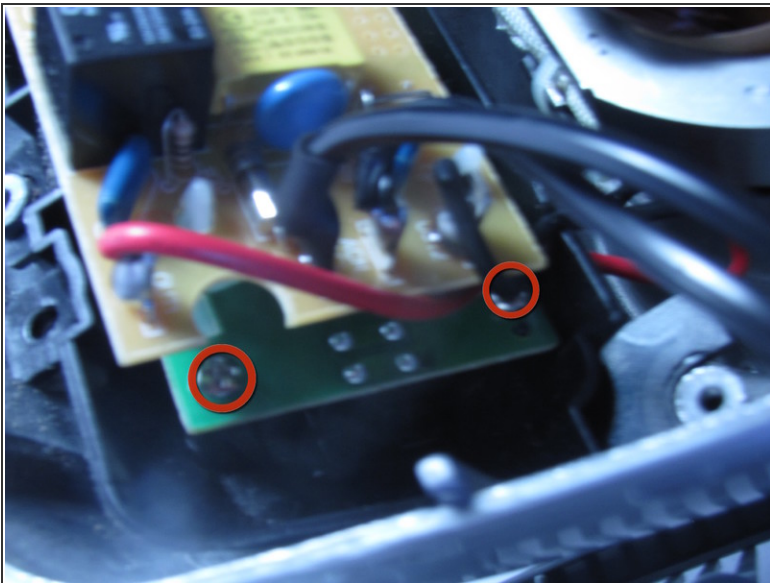


- Remove the four screws located on the circuit board.
 - Two are on the left side.
 - Two are on the right side.

Step 8

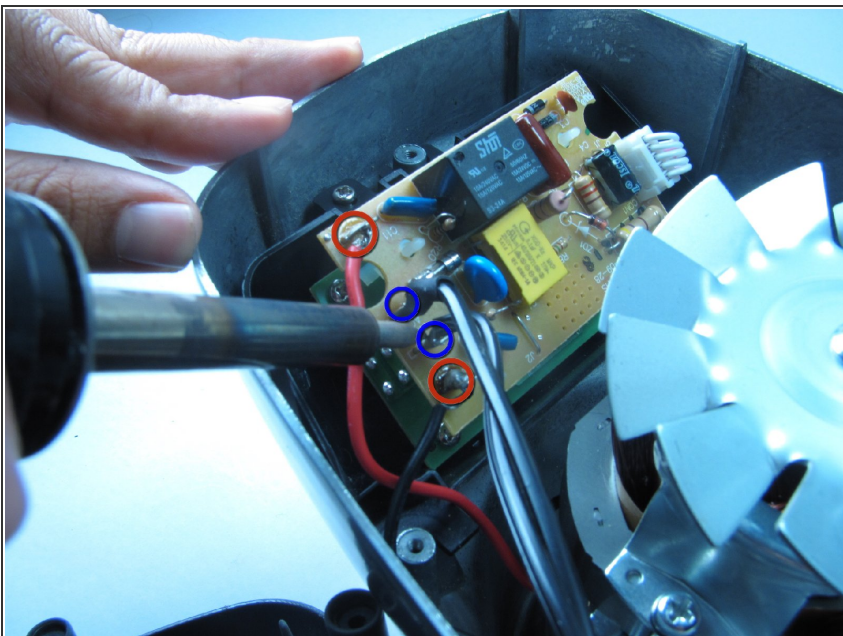

- Remove the following soldered connections with a soldering iron:
 - Motor wires
 - Power cord wires

Step 9

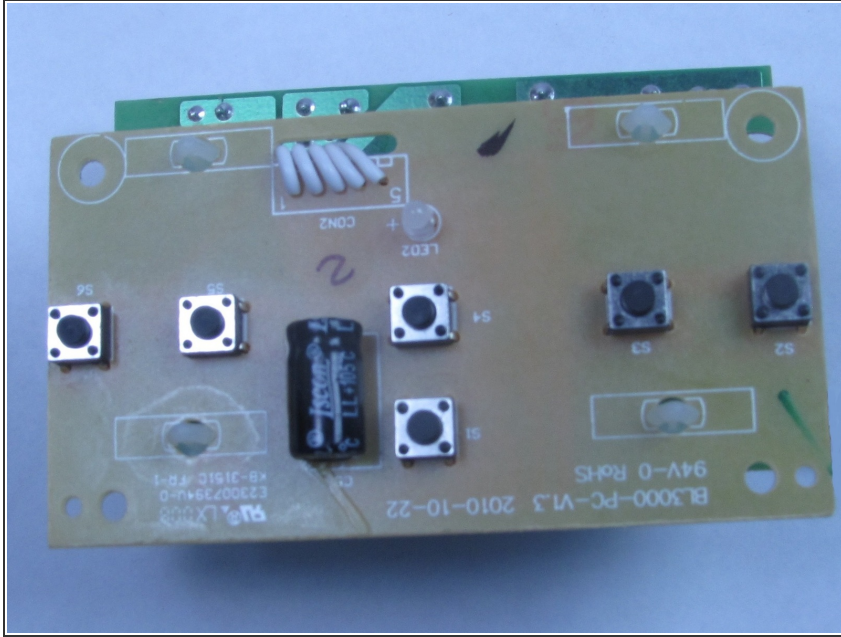

- Lift the circuit board straight up to remove it from the base.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-25 11:38:21 AM.